



# HOTBODIES RACING.COM

## Kawasaki ZX9R Undertail Kit



(Kawasaki Green, Candy Green, Firecracker Red, Lightening Blue)

**HOTBODIES RACING RECOMMENDS THAT YOU HAVE A PROFESSIONAL MECHANIC PERFORM THIS INSTALLATION. IF YOU CHOOSE TO "DO-IT-YOURSELF" ALWAYS TAKE APPROPRIATE SAFETY MEASURES WHEN INSTALLING THIS PRODUCT AND USE SAFETY GOGGLES AND LEATHER GLOVES. CAREFULLY READ ALL INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION PROCESS! HOTBODIES RACING WILL NOT REPLACE YOUR STOCK GLOVE-BOX FOR ANY REASON, MEASURE TWICE AND CUT ONCE!**

- 1) Carefully remove the tail section body work. Save all bolts, washers and plastic rivets for re-installation of tail. Disconnect and remove the brake light (with all mounting grommets and washers), license plate and turn signals, key lock (with clip) and move all wiring out of the cutting areas. Remove the two bolts at the rear end of the stock fender (inside glove box) to allow the end to hang down for cutting. Hot bodies racing will not replace stock your stock glove-box for any reason, so measure twice and cut once!

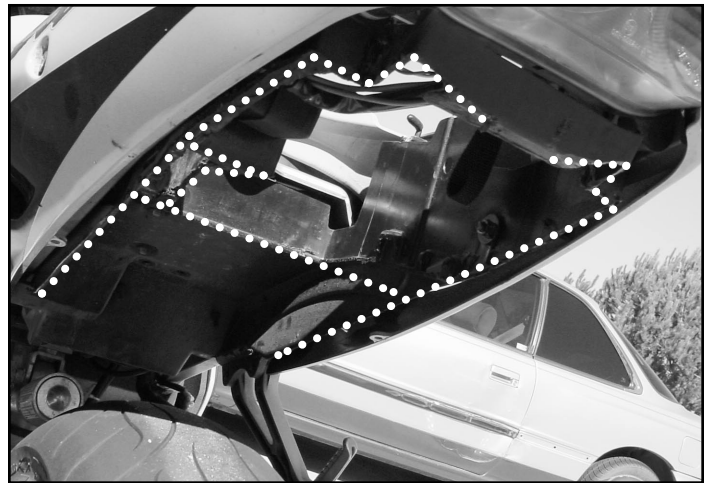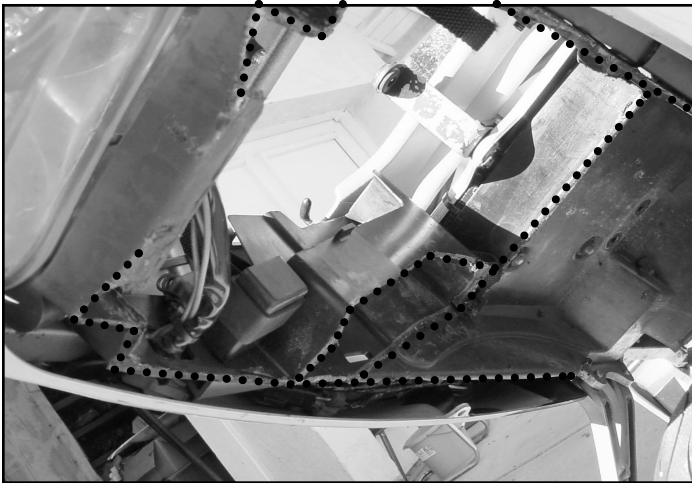


- 2) Using a "Dremel" tool or cutting disc (this can also be done using a sharp edged knife, but is not recommended), remove the plastic shown in the photos to the above and below. Be sure to take your time cutting, so that you don't cut away any more plastic than necessary.

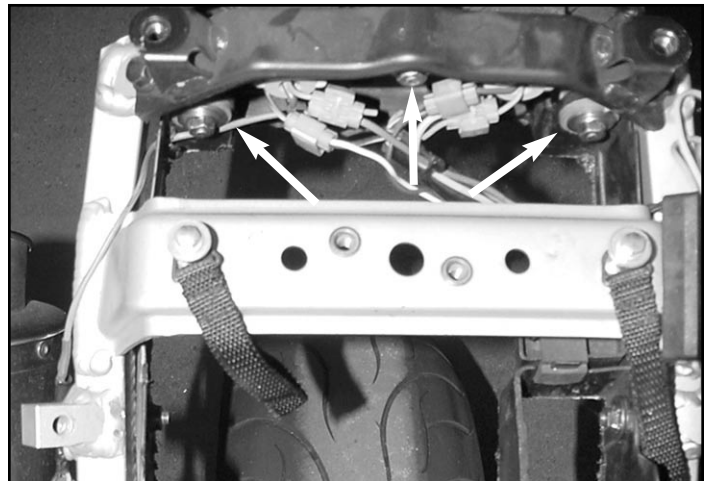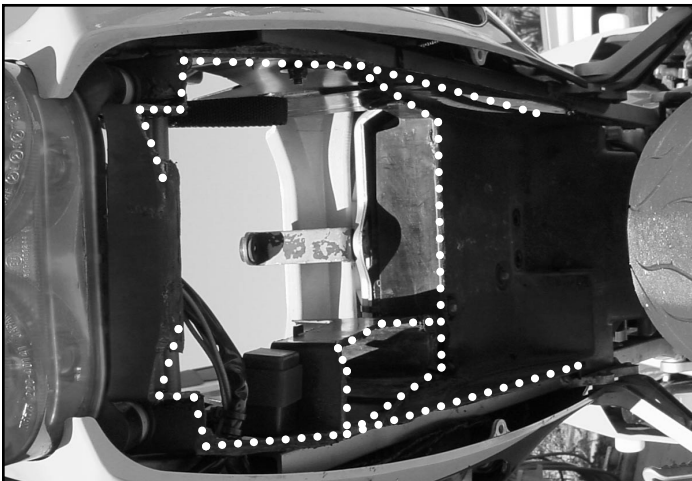


- 3) When replacing the light use the 6 spacers provided (2 for each mount) to move the light out towards the end of the bike.

**READ CAREFULLY BEFORE INSTALLATION!** This undertail like all undertails has been designed for off road racing use only, and has not been presented for D.O.T. certification! Hotbodies Racing Inc., our distributors, and our dealers will NOT be responsible for the use or misuse of this product. Always check with your local Department of Motor Vehicles before modifying any aspect of your motorcycle.



4) \*Install license plate brackets to back side of license plate as shown. Now hold license plate in desired location on undertail (under the opening near the brake light) , carefully mark and drill holes, install using the two (2) sets of allen bolts and lock nuts.



5) Re-attach your glove box and tail section, but leave all bodywork mounts loose to allow the bodywork to flex. Insert undertail left side first, then right side, be carefully not to crack or scratch undertail. Use your stock plastic screw rivets to hold undertail in place. Tighten all hardware on tail section, attach seats. Your done!

*\* After this modification your undertail is not returnable. Paint is not warranted against paint chips, flaking or scratches from installation or rocks being thrown from tire into the tray.*

Need Help? If you need additional help with the installation of the undertail, go to [www.hotbodiesracing.com](http://www.hotbodiesracing.com) and look for the [FAQs](#) link at the bottom of the home page. Most of your general questions can be answered on those pages. This installation does require a basic mechanical aptitude, if in doubt, contact your local motorcycle shop and have a professional mechanic perform the installation, 3 hours is the average installation time.