

HOTBODIES RACING.COM

Suzuki SV650 Undertail Kit


(1999-02, Available in: Yellow, Silver, Blue, Helos Red, Antaras Red, Gloss Black)

HOTBODIES RACING RECOMMENDS THAT YOU HAVE A PROFESSIONAL MECHANIC PERFORM THIS INSTALLATION. IF YOU CHOOSE TO "DO-IT-YOURSELF" ALWAYS TAKE APPROPRIATE SAFETY MEASURES WHEN INSTALLING THIS PRODUCT AND USE SAFETY GOGGLES AND LEATHER GLOVES. CAREFULLY READ ALL INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION PROCESS! HOTBODIES RACING WILL NOT REPLACE YOUR STOCK GLOVE-BOX FOR ANY REASON, MEASURE TWICE AND CUT ONCE!

1) Carefully remove the tail section body work. Save all bolts, washers and plastic rivets for re-installation of tail. Disconnect and remove the brake light (with all mounting grommets and washers), license plate and turn signals, key lock (with clip) and move all wiring out of the cutting areas. Remove the two bolts at the rear end of the stock fender (inside glove box) to allow the end to hang down for cutting.



2) Using a "Dremel" tool or cutting disc, remove the plastic shown in the photo above. Be sure to take your time cutting, so that you don't cut away any more plastic than necessary.

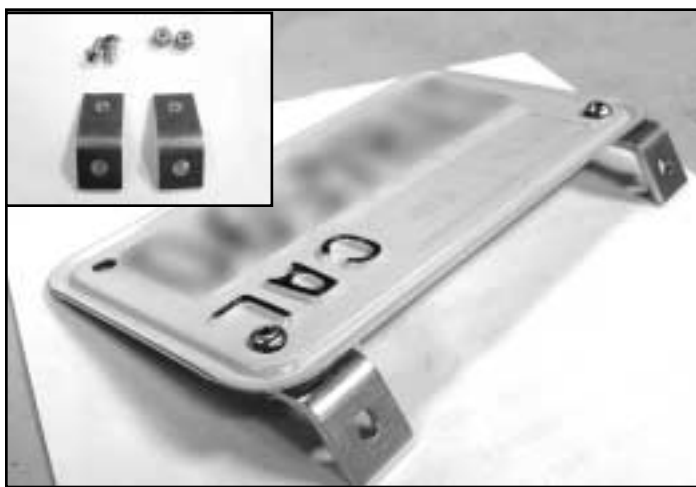

3) *Install license plate brackets to back side of license plate as shown. Now hold license plate in desired location on undertail, carefully mark and drill holes, install using the two (2) sets of allen bolts and lock nuts.



4) Re-install all body work leaving all fasteners loose. Now insert undertail into place, right side first, then left, then using stock "pop rivets" insert into body work and undertail. At bottom of undertail drill 2 holes to mount 2 more pop-rivets into bottom of battery box. Tighten, adjust undertail if necessary and re-tighten all stock fasteners, your done.

Need Help? If you need additional help with the installation of the undertail, go to www.hotbodiesracing.com and look for the "FAQs" link at the bottom of the home page. This installation does require a basic mechanical aptitude, if in doubt, contact your local motorcycle shop and have a professional mechanic perform the installation.

* After this modification your undertail is not returnable. Paint is not warrantied against paint chips, flaking or scratches from installation or rocks being thrown from tire into the tray.

READ CAREFULLY BEFORE INSTALLATION! This undertail like all undertails has been designed for off road racing use only, and has not been presented for D.O.T. certification! Hotbodies Racing Inc., our distributors, and our dealers will NOT be responsible for the use or misuse of this product. Always check with your local Department of Motor Vehicles before modifying any aspect of your motorcycle.